


Data sheet



I/O modules

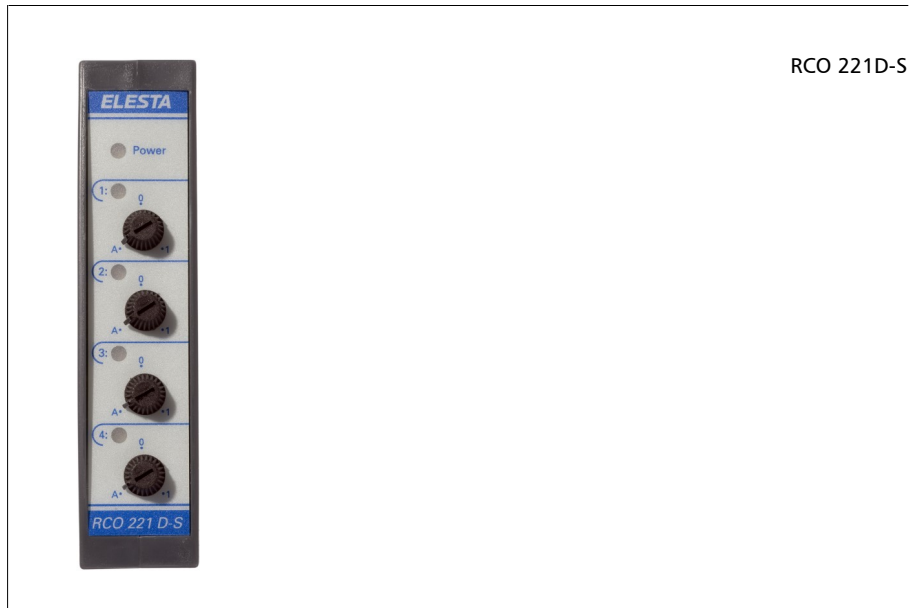

RCO 221D-S

Application

Controlesta RCO 221D-S is a Digital Output Module with manual override ability. The module can be operated in combination with a Master Controller RCO 9..D-M/W and is suitable for the operation in the RCO network. The slave module RCO 221D-S is able to supply digital output signals (230 V, 4 A) to the technical plant. The control -, optimising and monitoring functions are programmed within the Master Controller. Up to 32 I/O modules can be connected to one Master Controller via the L-bus.

Features

- 4 digital outputs with manual override ability
- Automatic feedback via the L-bus
- Plug-in terminals
- Small size
- For Din-rail- or panel door mounting
- Approved according to European EMC standards EN IEC 61000-6-1:2019, EN 55011:2016 + A1:2017
- CE-Approval
- GOST-R conformity certified



Environmental conditions

Ambient temperature	0 ... 50 °C
Storage temperature	-20 ... 60 °C
Ambient humidity	0 ... 85 % rH, not condensing
Protection class	II

Execution

Housing	plastic, for Din-rail- or panel door mounting
Production	to ROHS manufactured in acc. with EN IEC 63000:2018
Dimension	W x H x D, 22,5 x 97 x 125 mm
Weight	170 g

Electrical data

Power supply	24 VDC +/- 10 %, Class II
Power consumption	2,9 W
Wire capacity	14 ... 24 AWG (0,25 ... 2,5 mm ²)
Main tightening torque	0,55 ... 0,8 Nm
Protection acc. to EN 60529	IP 20

Bus

L-Bus	speed in Kbps	20 / 100 / 500 / 1000
	max. length	depending on speed
	max. participants	32 participants

Functional data


Communication Interface	1 L-Bus Interface	
Outputs:	4 digital outputs with change-over contact for 230 V / 4A, with manual override Auto, 0, 1 and feedback to RCO Master via L-bus	
Power LED	green	L-bus active
	red	L-bus not active

Per output a two-coloured LED is integrated.
 Automatic operation/output active: LED green
 Automatic operation/output not active: LED out
 Hand operation 1: LED red
 Hand operation 0: LED out


Programming

Within the Master Module RCO 9...D-M/W

Connection allocation

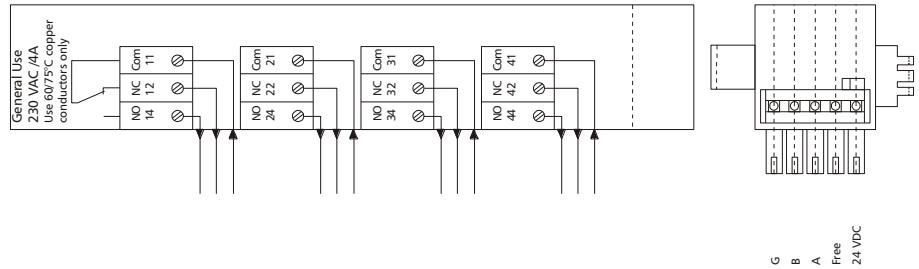

DIP switch setting

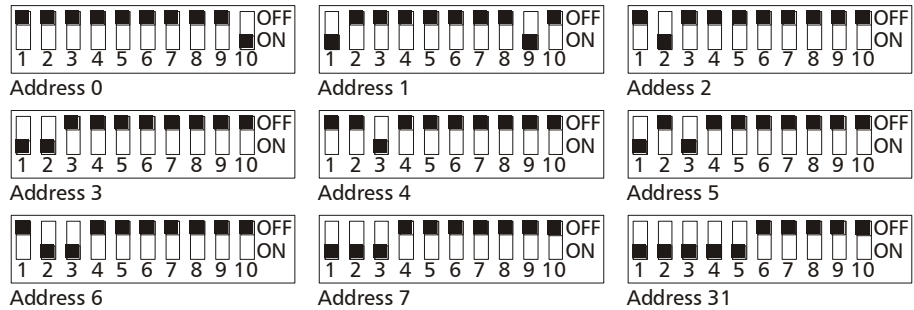


DIP switch 1-5: Address 0-31 adjustable
 DIP switch 6-7: Without function
 DIP switch 8-9: Baud rate



DIP switch 10: Termination resistance have to be activated (ON) for the first and the last device

Dimension drawing

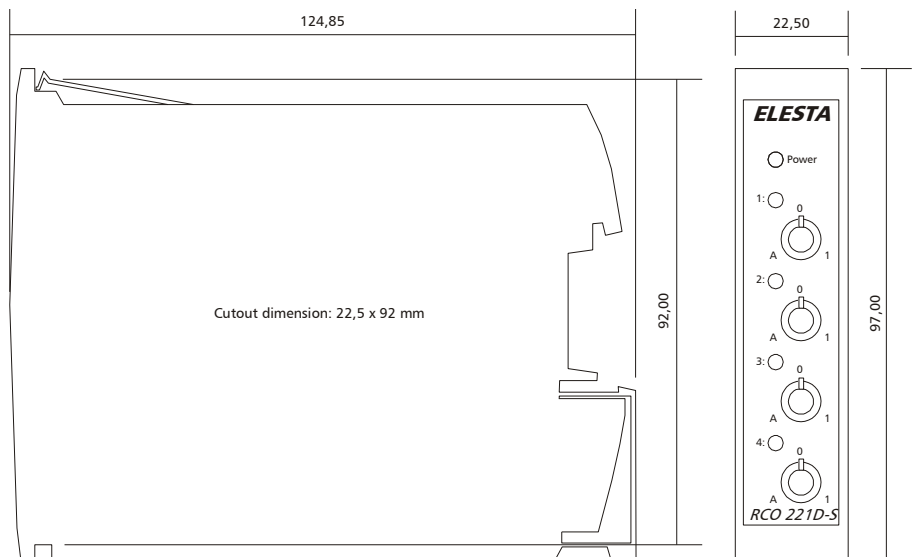

Delivery scope

RCO 221D-S