## Building management system Touch operator panel RCO 686D-S



Datasheet 686D-S







**Features** 

**Enviromental Conditions** 

Model

Electrical data

Functional data



The Controlesta RCO 686D-S is a graphical 10,1" touch operator panel for the building automation system Controlesta RCO. The operator panel connects to the embedded web server of a controller of the RCO 8...D-W, RCO 9...D-W series over the TCP/IP network. Animated visualizations for graphical operation, setpoints, time schedules, etc. can be changed, trends can be visualized, alarms are displayed and can be acknowledged.

efficient engineering over the RCO-tool

Touch operated

LED-backlight

Approved to European EMC standards CENELEC EN 50 082-1 and EN 55 011

CE-Approval

Operating temperature -10 ... 60 °C

Ambient humidity 5 ... 85 % relative humidity, non condensing

Protection class Ш

Housing Aluminium, for door mounting

Production According to ROHS

**Dimensions** Wx Hx D, 294 x 194 x 54 mm

Weight 1750 g

via power optional supply 100-240VAC / 12 VDC or wide-range input 12-36VDC Power supply

**Power Consumption** 15,0 W

Protection acc. to EN 60529 IP 65 (front side)

Screen diagonal 10,1"/25,65cm Active screen size 217 x 136 mm

> 16:10 Aspect ratio Display type TFT-LCD

1280 x 800 Pixel Resolution

Colours displayed 16,7Mio 400 cd/m<sup>2</sup> Brightness Contrast 700:1

View angle 80°(H) / 80°(V)


Response time 5 ms Backlight type LED

# Building management system Touch operator panel RCO 686D-S



#### Operation

The system is operated by briefly tapping the corresponding keys or symbols on the freely configurable user interface.

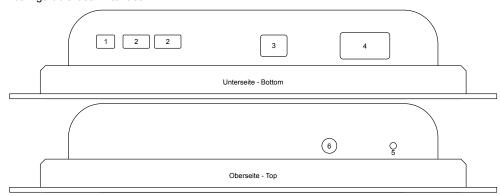

#### Interfaces

- 1 Power supply socket
- 2 USB Ports
- 3 Network port
- 4 Wide-range socket
- 5 Grounding
- 6 WiFi SMA connector

Connection for a optional power supply

For USB sticks or similar

RJ45 Port for the network connection

12-36VDC wide-range input

Screw thread for earthing the panel For connection to an existing wireless

network

### **Dimension drawing**



Important information

Only use **shielded** patch cables (S-UTP/SF-UTP/S-FTP/SF-FTP/S-STP)!

Scope of delivery

RCO 686D-S 4x mounting clips

Additional information

At www.elesta.de you will find this document as well as the instructions for operating and configuring the ELESTA Webpanel App.

https://elesta.de/en/touch\_en/

Or simply scan the QR-code on the first page of this document.