



Application

The Controlesta RCO 696D-S is a graphical 15,6" touch operator panel for the building automation system Controlesta RCO. The operator panel connects to the embedded web server of a controller of the RCO 8...D-W, RCO 9...D-W series over the TCP/IP network. Animated visualizations for graphical operation, setpoints, time schedules, etc. can be changed, trends can be visualized, alarms are displayed and can be acknowledged.

Features

- efficient engineering over the RCO-tool
- Touch operated
- LED-backlight
- Approved to European EMC standards CENELEC EN 50 082-1 and EN 55 011
- CE-Approval

Environmental Conditions

Operating temperature	-10 ... 60 °C
Ambient humidity	5 ... 85 % relative humidity, non condensing
Protection class	III

Model

Housing	Aluminium, for door mounting
Production	According to ROHS
Dimensions	W x H x D, 420 x 269 x 70 mm
Weight	3500 g

Electrical data


Power supply	via optional power supply 100-240VAC / 12 VDC or wide-range input 12-36VDC
Power Consumption	20,0 W
Protection acc. to EN60529	IP 65 (front side)

Functional data

Screen diagonal	105,6"/39,62cm
Active screen size	344 x 194 mm
Aspect ratio	16:9
Display type	TFT-LCD
Resolution	1920 x 1080 Pixel
Colours displayed	16,7Mio
Brightness	400 cd/m ²
Contrast	700:1
View angle	80°(H) / 80°(V)
Response time	5 ms
Backlight type	LED

Operation

The system is operated by briefly tapping the corresponding keys or symbols on the freely configurable user interface.

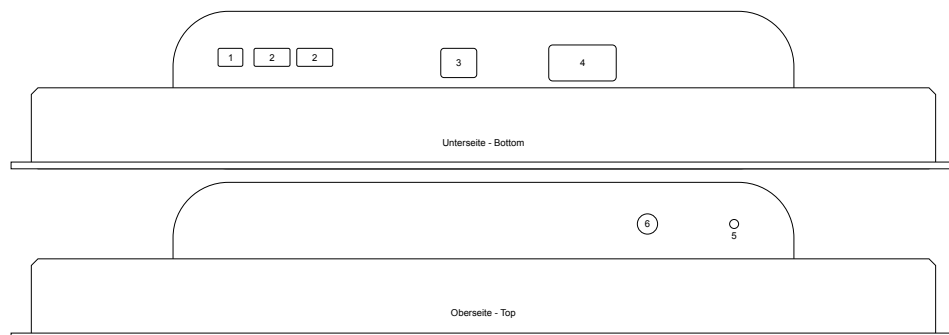


Interfaces

- 1 Power supply socket
- 2 USB Ports
- 3 Network port
- 4 Wide-range socket
- 5 Grounding
- 6 WiFi SMA connector

Connection for a optional power supply
For USB sticks or similar
RJ45 Port for the network connection
12-36VDC Wide-Range input
Screw thread for earthing the panel
For connection to an existing wireless network

Dimension drawing

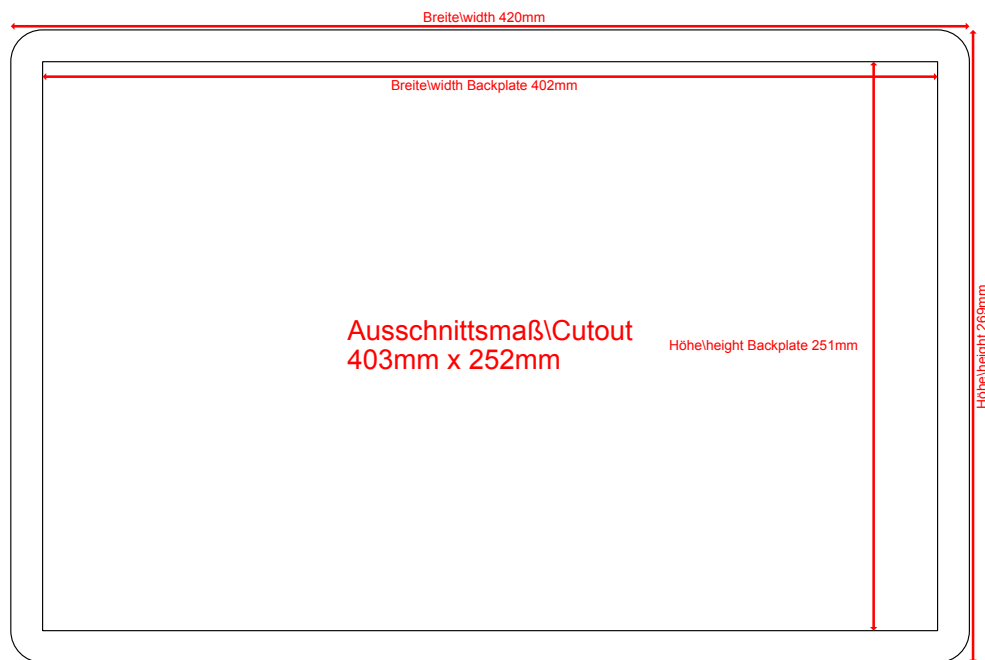

Important information

Only use **shielded** patch cables
(S-UTP/SF-UTP/S-FTP/SF-FTP/S-STP)!

Scope of delivery

RCO 696D-S
4x mounting clips

Additional information

At www.elesta.de you will find this document as well as the instructions for operating and configuring the ELESTA Webpanel App.
https://elesta.de/en/touch_en/
Or simply scan the QR-code on the first page of this document.